


HIGH PRESSURE WATER CLEANING HOSE

DATA SHEET 156-98

TYPE : DP

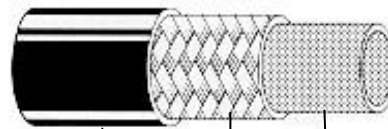

POLYESTER / ELASTOMER (PE-E)
STEEL WIRE BRAID
POLYURETHANE COVER (PU)

CONSTRUCTION

- **Inner tube** Polyester / Elastomer
- **Reinforcement** High tensile brass plated carbon steel wire
- **Cover** Polyurethane

APPLICATION

- High pressure cleaning and water-jetting
- Drain cleaning

PROPERTIES

- Excellent flexibility
- High abrasion resistance
- Light weight
- UV and Ozone resistant
- Kinkless
- Operating temperature range : -40° to 98°C

TECHNICAL SPECIFICATIONS: EXITFLEX TYPE DP

HOSE TYPE

DP 1.3

NOMINAL BORE METRIC		4
HOSE I.D. INCH		3/16"
HOSE I.D. MILLIMETRE		4,8
HOSE O.D. MILLIMETRE		9,2
MAXIMUM OPERATING PRESSURE	in Bar	250
	in PSI	3625
MINIMUM BURST PRESSURE	in Bar	1000
	in PSI	14500
MINIMUM BEND RADIUS IN MILLIMETRE		65
NOMINAL WEIGHT GRAMS PER METER		105

STANDARD COLOUR : Bronze

AVAILABLE ON REQUEST

- OTHER COLOURS available for large quantities
- HOSE ASSEMBLIES are all fitted with bichromated steel couplings swaged permanently to the hose
- SELECTED STAINLESS STEEL couplings available
- BULK HOSE : is available on non-returnable reel
- Various Adaptors, Rotary & Static nozzles available

All recommendations and suggestions appearing in this bulletin concerning the use of our products are based upon tests and data believed to be reliable. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Exit S.A., its subsidiaries, affiliates and distributors, as to the effects of such use or the results to be obtained, nor is any information to be construed as a recommendation to infringe any patent.