


SAFETY FLEX HIGH PRESSURE PAINT HOSE

113-99

TYPE : KX

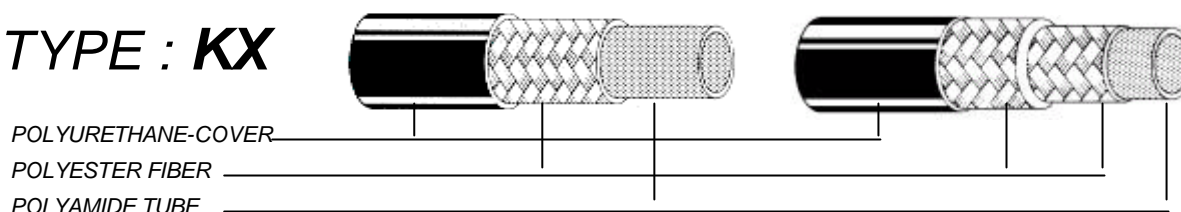

Hose inner core of Polyamide, resistant to most of the solvents used in the paint industry, cover made of polyurethane for excellent flexfatigue and abrasion resistance. Manufactured to meet special requirement and specifications, especially recommended for use with all type of air assisted and airless units. Hose can be produced with or without electrical conductivity.

CONSTRUCTION

- **Inner tube :** Polyamide
- **Reinforcement :** One or two ply of high tensile Polyester textile fiber
- **Cover :** Polyurethane

APPLICATION

- pressure painting

TEMPERATURE RANGE

- -40°C to 95°C -40°F to 210°F

PROPERTIES

- safety thermoplastic hose to work at higher operating pressures
- excellent resistance to paints, solvents and chemicals
- excellent flexibility, flexfatigue & non kinking
- abrasion & ozone resistant cover
- superior electrical conductivity, except for **KN**
- small bend radius & very light weight
- excellent volumetric expansion capability

TECHNICAL SPECIFICATIONS : EXITFLEX TYPE KX SINGLE & DOUBLE TEXTILE BRAID

HOSE TYPE		KX 1.3	KX 2.3	KX 1.4	KX 2.4
NOMINAL BORE METRIC		4	4	6	6
HOSE I.D. INCH		3/16"	3/16"	1/4"	1/4"
HOSE I.D. MILLIMETRE		4,7	4,7	6,4	6,4
HOSE O.D. MILLIMETRE		9,3	10,4	11,50	12,3
MAXIMUM OPERATING PRESSURE	in Bar	130	235	120	250
	in PSI	1900	3400	1750	3625
MINIMUM BURST PRESSURE	in Bar	520	940	480	1000
	in PSI	7600	13600	7000	14500
MINIMUM BEND RADIUS IN MILLIMETRE		35	40	50	55
NOMINAL WEIGHT GRAMS PER METER		60	73	80	94

Note: UPON SPECIAL REQUEST

- HOSE ASSEMBLIES are all fitted with **bichromated steel** couplings swaged permanently to the hose. **Stainless steel** version also available (wetted parts only)
- COLOUR : standard cover colour blue-light, others available in large quantities at customers request
- NON CONDUCTIVE : Specify type **KN X.X**

All recommendations and suggestions appearing in this bulletin concerning the use of our products are based upon tests and data believed to be reliable. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Exit S.A., its subsidiaries, affiliates and distributors, as to the effects of such use or the results to be obtained, nor is any information to be construed as a recommendation to infringe any patent.