


HIGH PRESSURE PAINT HOSE

112-02

TYPE : PAT

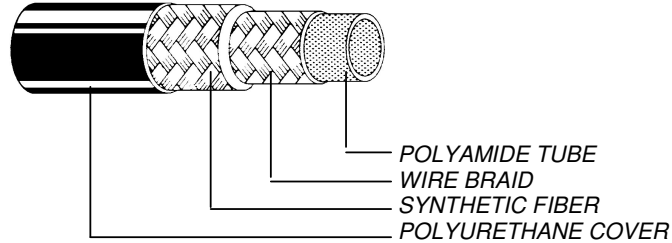

Hose inner core of Polyamide, resistant to most of the solvents used in the paint industry, cover made of polyurethane for excellent flex fatigue and abrasion resistance. Manufactured to meet special requirement and specifications, especially recommended for use with all type of air assisted and airless units.

CONSTRUCTION

- **Inner tube:** Polyamide
- **Reinforcement:** One high tensile steel wire braid
One high dtex synthetic fiber braid
- **Cover:** Polyurethane

APPLICATION

- High pressure painting
- High pressure hydraulics

TEMPERATURE RANGE

- -40°C to 95°C -40°F to 210°F

PROPERTIES

- Safety thermoplastic hose to work at higher operating pressures
- Excellent resistance to paints, solvents and chemicals
- Excellent flexibility, flex fatigue & non kinking
- Abrasion & ozone resistant cover
- 100% electrical conductivity
- Small bend radius & very light weight
- Very low volumetric expansion

TECHNICAL SPECIFICATIONS: EXITFLEX TYPE PAT DOUBLE TEXTILE & WIRE BRAID

HOSE TYPE		PAT 2.4	PAT 2.6
NOMINAL BORE METRIC		6	10
HOSE I.D. INCH		1/4	3/8
HOSE I.D. MILLIMETRE		6,4	9,6
HOSE O.D. MILLIMETRE		13,3	16,4
MAXIMUM OPERATING PRESSURE	in Bar	425	325
	in PSI	6162	4712
MINIMUM BURST PRESSURE	in Bar	1700	1300
	in PSI	24650	18850
MINIMUM BEND RADIUS IN MILLIMETRE		40	50
NOMINAL WEIGHT GRAMS PER METER		210	330

Note: UPON SPECIAL REQUEST

- HOSE ASSEMBLIES are all fitted with **bi chromated steel** couplings swaged permanently to the hose.
Stainless steel version also available (wetted parts only)
- COLOUR : standard cover colour in black or blue others available in large quantities at customers request

All recommendations and suggestions appearing in this bulletin concerning the use of our products are based upon tests and data believed to be reliable. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Exit S.A., its subsidiaries, affiliates and distributors, as to the effects of such use or the results to be obtained, nor is any information to be construed as a recommendation to infringe any patent.